

Forklift / Loader Tyre

★ **Application:** Forklift Truck, Lift Truck, Stacker Truck, Trailer Loader, Sideloader.

★ **Technical Data**

Size	Rim	Pattern	O.D. mm	S.W. mm	W.t. kgs	Max Load @ 25 km/h kgs
13x4.5	2.75	TJ50704	314	96	5.5	500
3.50-5	2.75/3.00	TJ50601/TJ50704	292	98	6.0	500
4.00-8	2.5/3.00/3.75	TJ50601/TJ50704	413	100	10.5	720
5.00-8	3.00	TJ50601/TJ50602/TJ5601H/TJ50702	452	125	17.0	1070
15x41/2.8	3.00	TJ50703/TJ50601/TJ50602	380	116	10.0	800
16x6-8	4.33	TJ50601/TJ50602	416	146	16.0	1070
18x7-8	4.33	TJ50601/TJ50602	457	165	22.5	1640
6.00-9	4.00	TJ50601/TJ50602/TJ50701/TJ50702/TJ5601H	536	150	28.5	1420
21x8-9	6.00	TJ50601/TJ50602	525	180	35.0	2120
6.50-10	5.00	TJ50601/TJ50602/TJ5601H/TJ50702	575	165	36.0	1780
17 1/2x6-10	5.00	TJ50702	452	150	17.5	1200
23x9-10	6.50	TJ50601/TJ50602	588	215	50.0	2585
200/50-10	6.50	TJ50601/TJ50602	460	200	25.0	2200
7.00-12	5.00	TJ50601/TJ50602/TJ50701/TJ50702/TJ5601H	667	173	48.5	2240
8.25-12	5.00	TJ50601	714	190	60.0	3400
16x5-12	3.75	TJ50704	406	124	8.0	700
23x7-12	5.00	TJ50601	560	170	30.0	1500
23x10-12	8.00	TJ50601/TJ50602	580	240	48.5	2900
27x10-12	8.00	TJ50601/TJ50602	670	245	75.0	2935
5.50-15	4.50	TJ50601	665	155	37.0	1700
6.00-15	4.50	TJ50601	665	155	37.0	1700
250-15	7.00/7.50	TJ50601/TJ50602	717	236	72.0	3570
300-15	8.00	TJ50601/TJ50602/TJ5601H	820	260	112.0	4410




TJ50703 TJ50701 TJ50702 TJ50704 TJ5601H TJ50602 TJ9902H

Size	Rim	Pattern	O.D. mm	S.W. mm	W.t. kgs	Max Load @ 25 km/h kgs
22 1/4x7 1/2-15	5.50	TJ50702	580	180	28.0	1420
7.00-15	5.50/6.00	TJ50601	719	180	62.0	2690
7.50-15	5.50/6.00	TJ50601	805	194	78.0	2980
8.15-15 (28x9-15)	6.50/7.00	TJ50601/TJ50602/TJ5601H/TJ50702	710	210	63.0	3445
8.25-15	6.50	TJ50601/TJ50602/TJ5601H	820	205	92.0	3650
28x12.50-15	9.75	TJ50601	717	281	88.0	5200
35.5/65-15	9.75	TJ50601	840	345	162.0	6000
7.50-16	5.50/6.00	TJ50601	805	196	75.0	2435
8.25-16	7.00	TJ50601	845	240	109.5	4200
9.00-16	7.00	TJ50601	845	240	109.5	4200
26x8-16	6.00	TJ50601	650	170	45.0	3000
28x9-16	6.00	TJ50601	717	210	57.0	3000
300-16	8.00	TJ50601	840	260	106.0	3800
8.25-20	6.50	TJ50601/TJ5601H	980	220	127.0	4000
9.00-20	7.00	TJ50601/TJ5601H	980	220	130.0	4555
10.00-20	7.00/7.50/8.00	TJ50601/TJ5601H	1040	250	167.0	5000
11.00-20	7.00/7.50/8.00/8.50	TJ50601/TJ5601H	1100	265	210.0	5600
12.00-20	8.00/8.50	TJ50601/TJ5601H	1140	294	252.0	6250
380/70-20	12.00	TJ50601	1040	385	268.0	6000
12.00-24	8.00/8.50	TJ50601	1210	304	270.0	7200
13.00-24	8.50	TJ50601	1250	320	322.0	8000
14.00-24	10.00	TJ50601/TJ50805	1350	350	405.0	11220
14.00-25	10.00	TJ50601/TJ50805	1350	350	400.0	11550



TJ1805 TJ1805H TJ1601 TJ1601H TJ1801H TJ1601H

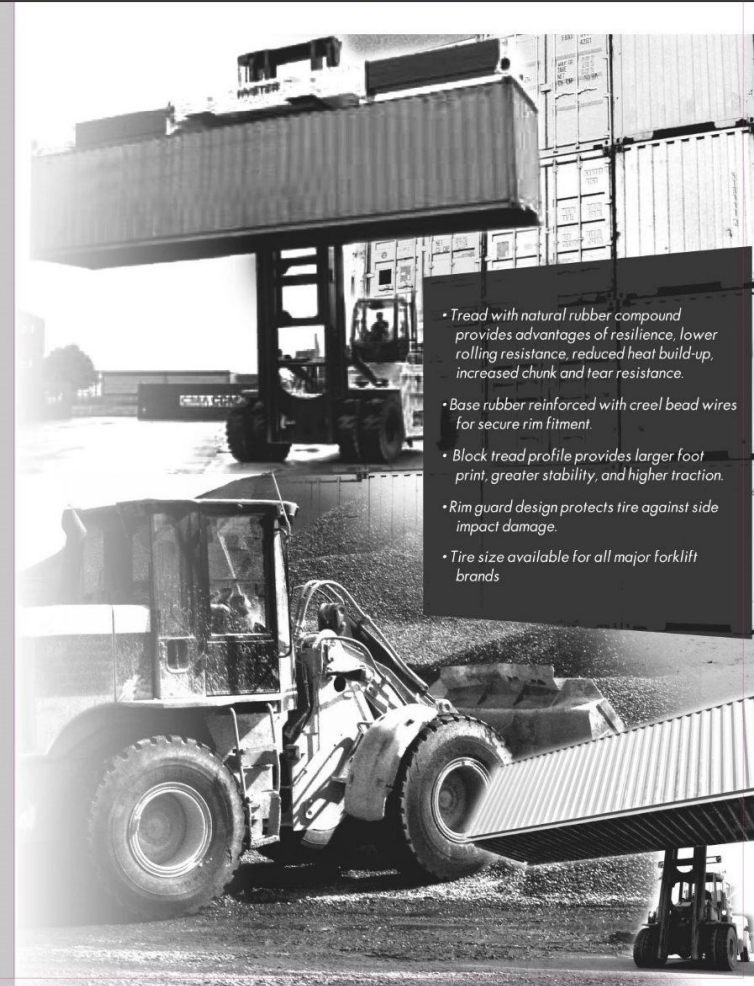

- Tread with natural rubber compound provides advantages of resilience, lower rolling resistance, reduced heat build-up, increased chunk and tear resistance.
- Base rubber reinforced with creel bead wires for secure rim fitment.
- Block tread profile provides larger foot print, greater stability, and higher traction.
- Rim guard design protects tire against side impact damage.
- Tire size available for all major forklift brands

Skid Steer/Telehandler/Aerial Lift Tyre

★ **Application:** Skid Steer Loader, Aerial Work Platform(AWP)

★ **Technical Data**

Size	Rim	Pattern	O.D.		S.W.		W.t. kgs	Max Load @ 30 km/h			'Replaceable Size Of Pneumatic Tire'
			mm	inch	mm	inch		LBS	kgs		
5.70-12	4.00	TJ9801H	570	22.40	14.5	5.70	25.0	14.50	6.58		5.70-12
23x8.50-12	5.00	TJ9801H	580	22.80	18.0	7.08	35.0	18.10	8.21		23x8.50-12
27x8.50-15	5.50	TJ9801H	675	26.60	20.0	7.90	47.0	27.60	12.52		27x8.50-15
7.50-16	6.00	TJ9601H	805	31.70	19.6	7.70	69.0	48.40	22.00		10-16.5
30x8.5-16	6.00	TJ9801H	765	30.10	19.0	7.50	57.0	48.40	22.00		10-16.5
30x10-16	6.00	TJ9601H	768	30.23	24.0	9.44	76.0	48.40	22.00		10-16.5
30x10-16	6.00	TJ9801H	767	30.20	24.0	9.44	67.0	48.40	22.00		10-16.5
30x10-16	7.00	TJ9801H	767	30.20	24.0	9.44	70.0	48.40	22.00		10-16.5
31x10.5-16	6.00	TJ9801H	807	31.70	23.5	9.25	80.0	48.40	22.00		10-16.5
30x10-20	7.00	TJ9801H	762	30.00	24.0	9.44	60.0	48.40	22.00		10-16.5
32.5x15-16	11.25	TJ9801H	820	32.30	37.0	14.56	130.0	10.583	4800		12-16.5
33x12-16	8.00	TJ9801H	820	32.30	28.6	11.30	104.0	70.40	3200		12-16.5
33x12-16	8.00	TJ9601H	840	33.00	27.0	10.60	115.0	70.40	3200		12-16.5
30x10-18	7.00	TJ9801H	767	30.10	23.5	9.25	64.0	48.40	22.00		10-16.5
31x10.5-18	7.00	TJ9801H	807	31.70	23.5	9.25	76.0	48.40	22.00		10-16.5
31x10-20	7.00	TJ9601H	790	31.10	24.0	9.44	64.0	48.40	22.00		10-16.5
31x10.5-20	7.00	TJ9801H	807	31.70	23.5	9.25	69.0	48.40	22.00		10-16.5
32x10-20	7.00	TJ9801H	812	31.96	24.0	10.30	72.0	57.20	2600		10-16.5, 12-16.5
33x12-20	7.50	TJ9801H	830	32.70	28.5	11.30	83.0	66.00	3000		12-16.5
33x12-20	8.00	TJ9801H	830	32.70	28.5	11.30	85.0	66.00	3000		12-16.5
36.5x12-20	8.00	TJ9801H	930	36.61	30.0	11.90	127.0	79.20	3600		14-17.5
36.5x14-20	11.00	TJ9801H	930	36.61	35.0	13.80	156.0	83.60	3800		14-17.5, 35.5/70017.5
38.5x14-20	11.00	TJ9801H	970	38.19	34.2	13.46	175.0	91.00	4128		14-17.5, 38.5/65D19.5
15.00-20	11.00	TJ9801H	930	36.61	35.0	13.80	152.0	83.60	3800		14-17.5, 35.5/70017.5
380/70-20	12.00	TJ9601H	1040	40.95	38.1	15.00	275.0	12300	5579		15-19.5, 15-22.5
385/65-24	10.00	TJ9801H	1060	41.73	36.0	14.17	210.0	12300	5579		15-22.5, 38.5/65D22.5
445/65-20	12.00	TJ9801H	1060	41.73	43.0	16.92	310.0	10500	4762		18-19.5, 44.5/65D19.5
445/65-24	12.00	TJ9801H	1150	45.28	43.0	16.92	315.0	11400	5171		18-22.5, 44.5/65D22.5
30x10-20 SM	7.00	TJ9902H	765	30.10	25.0	9.84	68.0	48.40	2200		10-16.5
33x12-20 SM	8.00	TJ9902H	820	32.28	28.0	11.02	95.0	66.00	3000		12-16.5
7.50-16 SM	6.00	TJ9902H	800	31.49	21.0	8.26	78.0	48.40	2200		10-16.5
8.25-16 SM	6.00	TJ9902H	838	32.99	21.0	8.26	90.0	6000	2721		12-16.5

★ **Pattern**




TJ9801H

APEX SKID-STEER LOADER SOLID TIRES, GIVING THE FOLLOWING ADVANTAGES

- LONG WEAR LIFE WHICH IS SEVERAL TIMES LONGER THAN AN ORDINARY PNEUMATIC TIRES
- HIGH STABILITY WITH HIGH LOADS AND LIFTING
- FREE DOWN TIME ON FLATE TIRES
- CUTTING RESISTANCE AND PUNCTURE PROOF
- LOW ROLLING RESISTANCE

WHEEL CHANGE PROGRAM

- THE DISC OF THE WHEEL FITTING ON APEX SKID-STEER SOLID TIRES IS SPECIALLY MACHINED TO ACCOMMODATE THE PILOT HOLE AND MOUNTING BOLT CIRCLE OF THE INDIVIDUAL SKID-STEER MACHINES
- WHEEL ASSY DELIVERY PROGRAM IS AVAILABLE. TO ORDER, PLEASE CONFIRM WHAT MODEL OF YOUR SKID-STEER MACHINES ARE GOING TO CHANGE THE WHEEL

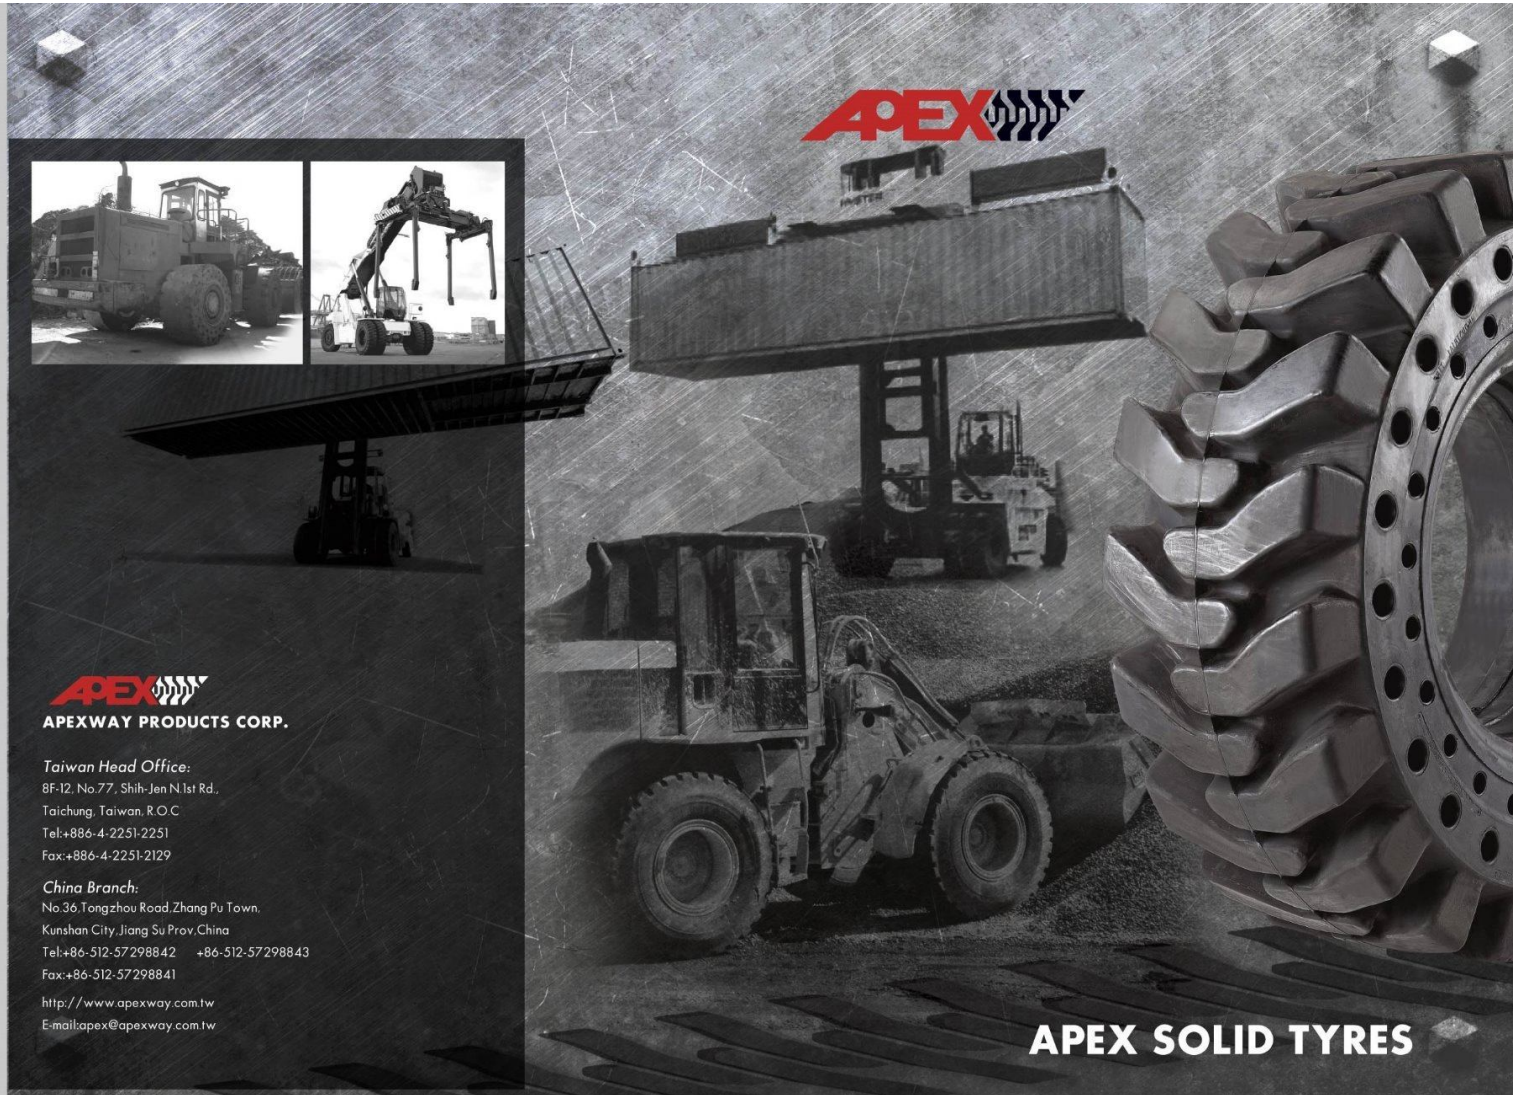

APEX
APEXWAY PRODUCTS CORP.

Taiwan Head Office:

8F-12, No.77, Shih-Jen N.1st Rd.,

Taichung, Taiwan, R.O.C

Tel:+886-4-2251-2251

Fax:+886-4-2251-2129

China Branch:

No.36 Tongzhou Road, Zhang Pu Town,

Kunshan City, Jiang Su Prov, China

Tel:+86-512-57298842 +86-512-57298843

Fax:+86-512-57298841

<http://www.apexway.com.tw>

E-mail:apex@apexway.com.tw

APEX SOLID TYRES